




บริษัท เทคโนโลยี ฟล็กซ์ จำกัด

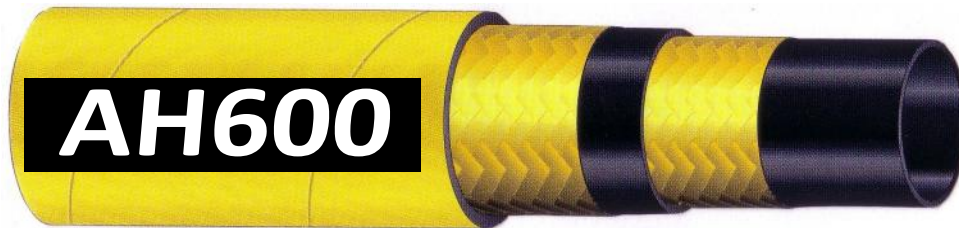

AH600 AIR/WATER HOSE 600 PSI

Designed For The Most Severe Working Conditions In Mining, Quarries, Industrial And Construction Service. This Mandrel Built Hose Has A High Margin Safety And Gives A Long And Trouble-Free Service Under The Most Arduous Working Conditions.

- Temperature Range** : -40°C (+40°F) to +100°C (+212°F)
Tube : Black, Smooth, Synthetic Rubber, Oil Mist Resistant
Reinforcement : Piles Of Steel Wire Cord
Cover : Yellow, Smooth (Wrapped Finish) Long Lasting Synthetic Rubber, Weather And Abrasion Resistant
Coils : 61mt (200ft) Continuous Length; Other Length Available On Request
Branding : Black Transfer Tape With Negative Text
AH600 HEAVY DUTY AIR HOSE WPSI 600'

Part Number	I.D.		O.D.		Working Pressure		Bursting Pressure (Theoretical)		Bending Radius	Hose Weight	
	mm	inch	mm	inch	bar	psi	bar	psi	mm	kg/m	lbs/ft
AH600-0050	13	1/2	24	15/16	40	600	210	3150	130	0.51	0.34
AH600-0075	19	3/4	31	1-7/32	40	600	160	2400	133	0.74	0.50
AH600-0100	25	1	38	1-11/16	40	600	160	2400	175	0.91	0.65
AH600-0125	32	1-1/4	45	1-57/64	40	600	160	2400	224	1.51	1.04
AH600-0150	38	1-1/2	56	2-7/32	40	600	160	2400	266	1.93	1.30
AH600-0200	51	2	69	2-11/16	40	600	160	2400	357	2.40	1.65
AH600-0250	63.5	2-1/2	81	3-1/8	40	600	160	2400	441	2.90	2.00
AH600-0300	76	3	95	3-7/8	40	600	160	2400	532	4.68	3.21
AH600-0400	102	4	120	5	40	600	160	2400	714	7.34	5.04
AH600-0600	152.4	6	175	6-7/8	40	600	120	1800	1215	10.30	6.98